




SPECIFICATION

ITEM	COMMON MODE CHOKE COIL (LINE FILTER)	Part No.	LF25
		Rev.	


1. DIMENSION (UNIT : mm)

Image


TOP




FRONT

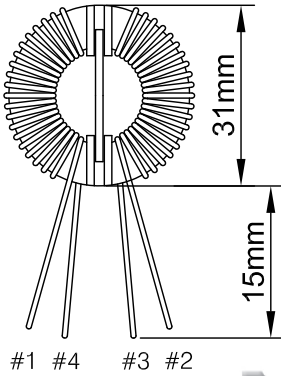

SIDE

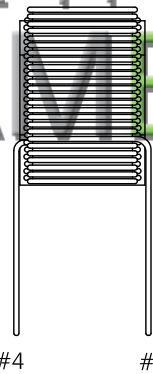

BOTTOM



PART NUMBER

EX) LF16S-183-2VB

- B=BASE (PIN TO PIN-10x13)
- V=VERTICAL, H=HORIZONTAL
- RATED CURRENT (2=2A, 2.5=2.5A)
- INDUCTANCE (183=18mH, 502=5mH)
- U_i (S=10000, H=7000, M=5500, B=3000)
- CORE SIZE (38:3813, 31:3115, 29:2915, 25:2512, 22:2213, 19:1906, 19A:1911, 16:1607, 14:1407, 13:1306, 12.7:T12.7, 10:1004, 08:0803)
- COMMON MODE CHOKE COIL (LINE FILTER-TOROID TYPE)

* CENTER AIR GAP	
* REMOVED PIN	
* CUTTING PIN	

DATE	09.10.15	HNE HANAM ELECTRONICS CO., LTD.	<i>YB.jeong</i>	<i>KD.KIM</i>	
PAGE			DESIGNED	CHECKED	APPROVED